


Fast, accurate, easy to use and easy to transport multifunction mobile pallet scale. It speeds up the weighing operations of any product packed on europallet (800x1200 mm): to weigh it is not necessary to leave the scale with the pallet truck, just lower it by simply resting the pallet on the U-shaped structure. The wheels and transport handles are standard, allowing the scale to be moved and used immediately to the place where it is to be weighed. Also available in CE APPROVED versions.

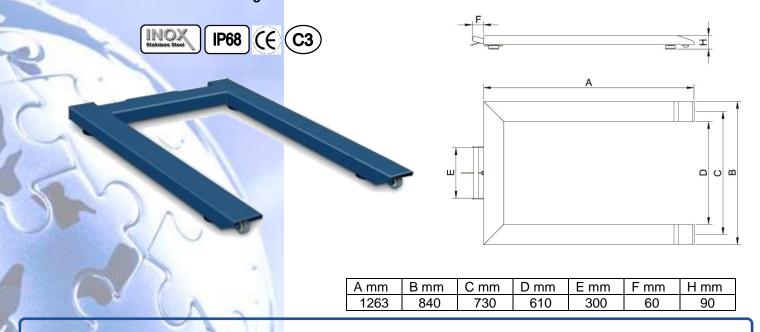

## **CHARACTERISTICS**

- Operated by 4 IP67 nickel-plated steel bending load cells of 350Ω approved to OIML R60 C3 (3000 divisions) with IP67 protection.
- Structure in shaped and stove-enamelled steel plate
- Accuracy: +/- 0.01% of maximum capacity in the internal version
- Accuracy: +/- 0.05% of the maximum capacity in the approved "M" version
- Adjustable shock-proof articulated feet, level bubble, 2 wheels and carrying handle
- 5/15 Vdc power supply
- 3 m shielded cable for indicator connection

## **AVAILABLE VERSIONS**

Código	Dimensiones (LxPxH) mm	Capacidad Kg	Divisiones standard g
PW	1263x840x90	1500	500
PW	1263x840x90	3000	1000



www.ascellsensor.com

info@ascellsensor.com



Tel: (+34) 93 776 60 89

Fax: (+34) 93 775 14 72